


HS-J6412L46主板


产品特性:

- Elkhart Lake 处理器
- 支持5*USB(2*USB2.0接口/2*USB3.0接口/1*TYPE-C接口)
- 支持4*LAN(Intel I226,2.5Gbps/1Gbps/100Mbps/10Mbps以太网控制器)

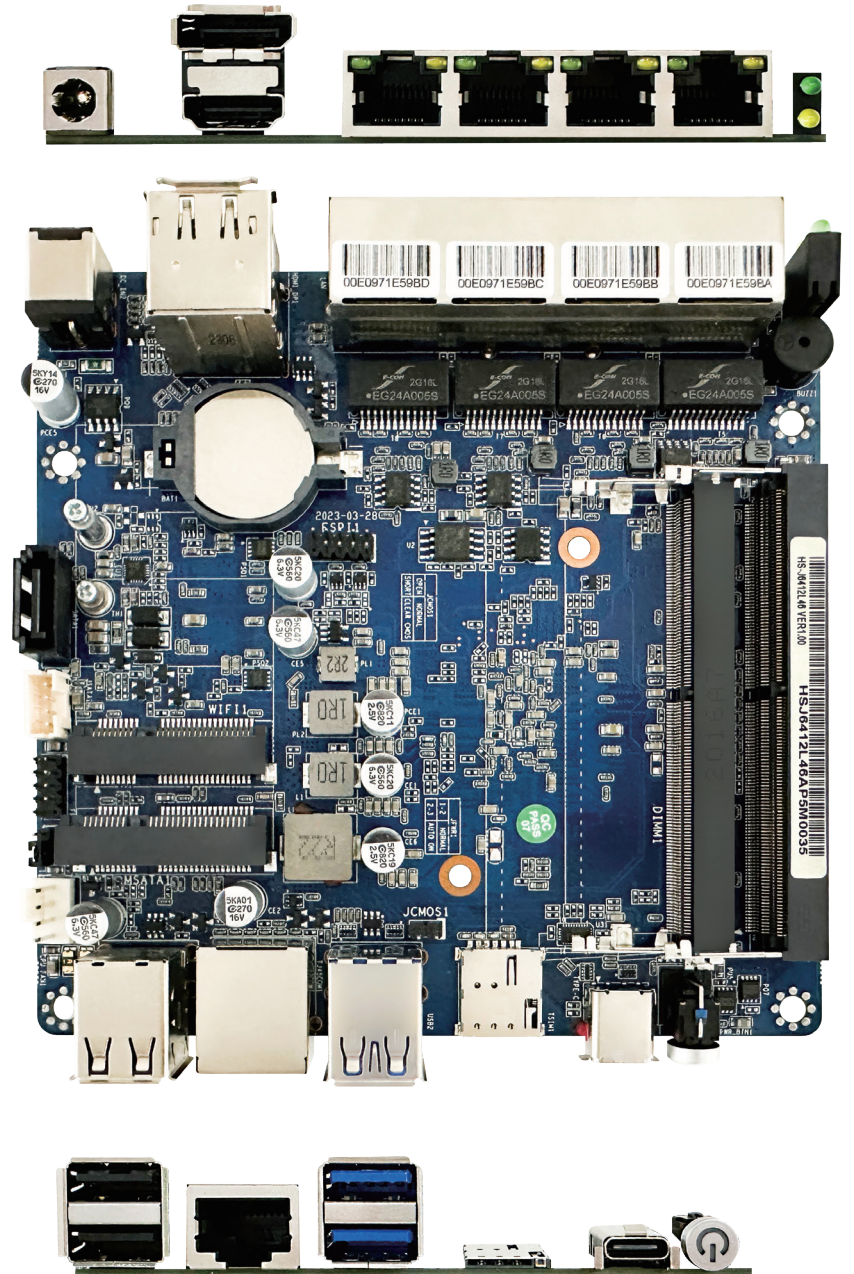

HS-J6412L46主板规格

板型尺寸	120mm*120mm
处理器	Elkhart Lake
内存	DDR4 3200MT/s 最大支持32GB
BIOS	AMIBIOS 128Mbit 闪存
内置I/O接口	1*Front panel排针 1*JSATA供电接口 1*SATA数据接口 2*DDR4内存槽 1*CPU_FAN排针 1*JPWR跳线
外置I/O接口	1*DC 12V接口 1*DP接口 1*HDMI接口 4*LAN口 2*USB2.0接口 1*TJ45COM接口 2*USB3.0接口 1*SIM卡槽 1*TYPE-C接口
集成网卡	4*Intel I226,2.5Gbps/1Gbps/100Mbps/10Mbps以太网控制器
扩展槽/口	1*MINI PCIE(WiFi)插槽/1*MINI PCIE(MSATA)插槽
操作系统	win10/win11, Linux

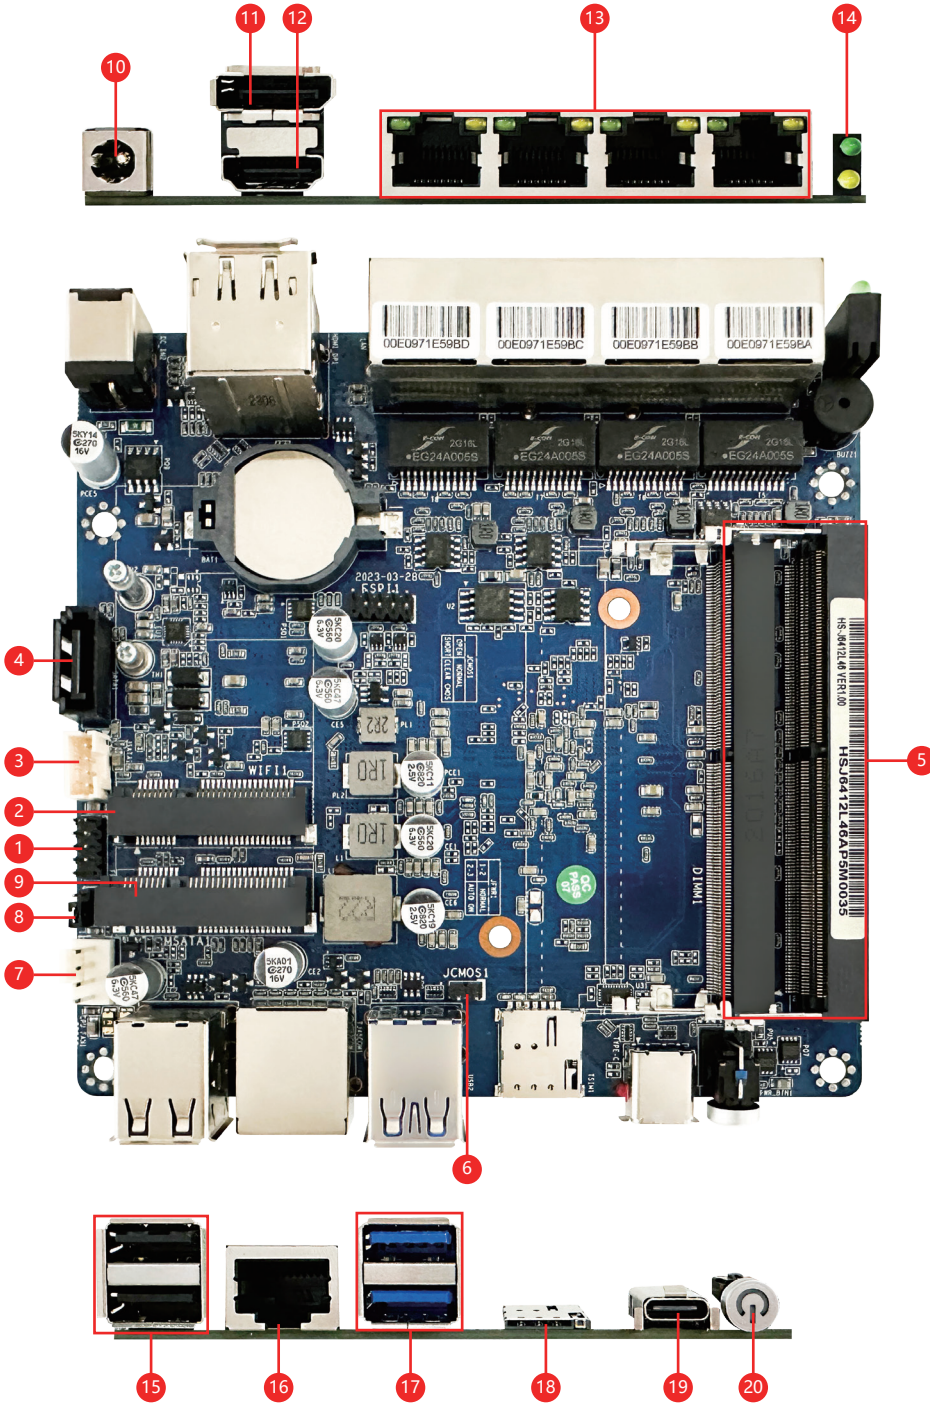

1	Front panel排针
2	MINI PCIE(WiFi)插槽
3	JSATA供电接口
4	SATA数据接口
5	DDR4内存槽
6	JCMOS插针
7	CPU_FAN排针
8	JPWR跳线
9	MINI PCIE(MSATA)插槽
10	DC 12V接口
11	DP接口
12	HDMI接口
13	LAN口
14	LED指示灯
15	USB2.0接口
16	TJ45COM接口
17	USB3.0接口
18	SIM卡槽
19	TYPE-C接口
20	电源键

HS-J6412L46主板定义

(1) Front panel排针

Location	Pin	Definition	Pin	Definition
FP1 (2.54mm)	1	3.3V	2	Power LED
	3	Hard Disk Drive LED	4	GND
	5	Reset Switch	6	Power Switch
	7	GND	8	GND
	9	NC		

(3) SATAPWR供电接口

Location	Pin	Definition
SATAPWR	1	+V5S
	2	GND
	3	GND
	4	+12V

(6) JCMOS排针

Location	Pin	Definition
JCMOS1 (2.54mm)	1	GND
	2	RTCRST_N

(7) CPU_FAN排针

Location	Pin	Definition
CPU_FAN1	1	GND
	2	+12V
	3	FAN_TAC
	4	FAN_CTL